
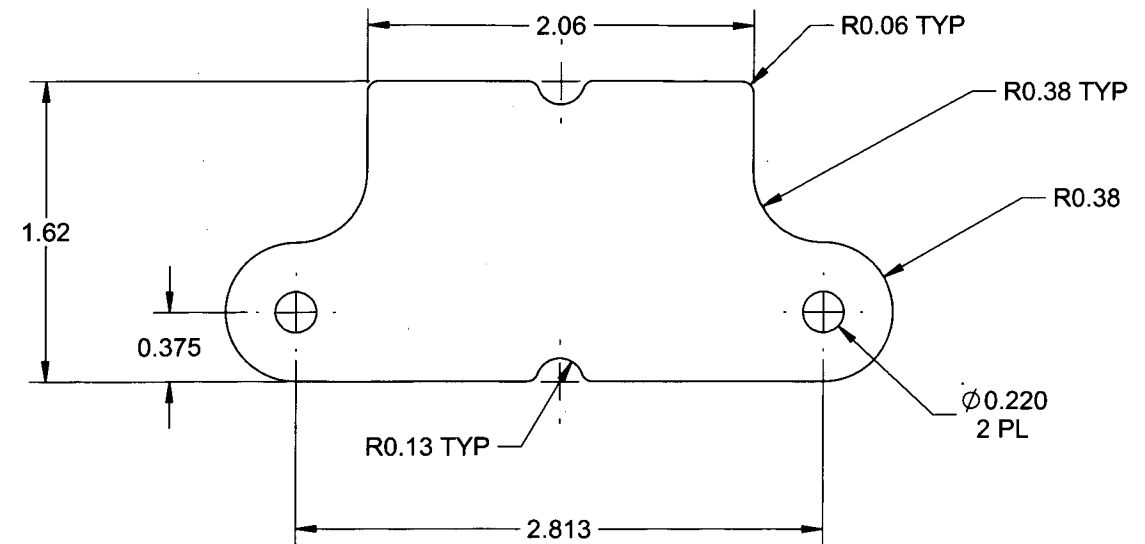


**D2974 PACKER**  
MAKE FROM D2974F

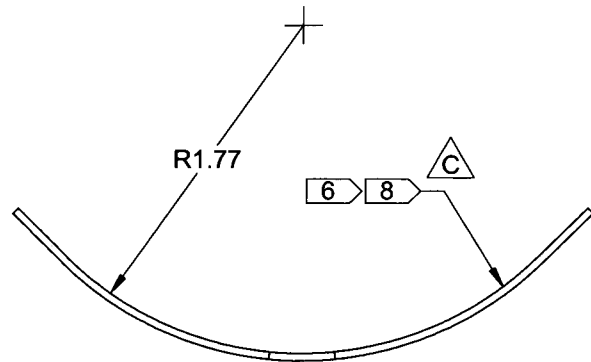

**D2974F FLAT PATTERN**

**RELEASED**  
2014-02-03

**NOTES:**

- 1) MATERIAL: AISI 304/316 STAINLESS STEEL SHEET PER AMS 5513 OR 5524 OR ASTM A240 OR ASME SA240 20 GAUGE (0.040 THICK), REF. DART SPEC. M304S20GA
- 2) FINISH: NONE
- 3) TOLERANCES: PER DART QSI 018 UNLESS OTHERWISE NOTED
- 4) UNITS: INCHES UNLESS OTHERWISE NOTED
- 5) BREAK SHARP EDGES: 0.010 TO 0.020 MAX
- 6) IDENTIFICATION: IDENTIFY WITH P/N D2974 AND B/N AS PER DART QSI 044 6.1 (FINE POINT PAINT MARKER)
- 7) WEIGHT: 0.05 lbs
- 8) COAT ENTIRE TOP (CONCAVE) SURFACE WITH TEXTURED COATING, 0.020-0.040 THICK, PER DART QSI 005 4.9



C	CHANGE NOTE 8 (ZN A4 AND B6), REF: NCR13-3166	SFM	13.10.25
B	FORMAT TO CURRENT STANDARD, AISI 304SS WAS 5052H-32 OR 6061-T6, REMOVE FINISH NOTE, ADD NOTE 8, ROCKGUARD COATING (ZN A8-1), REF CIR 12-13	DB	12.12.14
A	NEW RELEASE	RF	00.03.15
RÉV.	DESCRIPTION	BY	DATE
DESIGN	RF	<b>DART AEROSPACE USA, INC.</b> KENT, WA	
DRAWN	SFM		
CHECKED		DRAWING NO.	REV. C
MFG. APPR.		D2974	SHEET 1 OF 1
APPROVED		TITLE	SCALE
DE APPR.		PACKER	NTS
DATE	13.10.25	COPYRIGHT © 2000 BY DART AEROSPACE USA, INC. THIS DOCUMENT IS PRIVATE AND CONFIDENTIAL AND IS SUPPLIED ON THE EXPRESS CONDITION THAT IT IS NOT TO BE USED FOR ANY PURPOSE OR COPIED OR COMMUNICATED TO ANY OTHER PERSON WITHOUT WRITTEN PERMISSION FROM DART AEROSPACE USA, INC.	